

Description

This is an input board for mounting to the PT-RQ13K 3-chip DLP™ projector, and it allows input of two HDMI signal systems.

* This unit does not operate as a stand-alone unit. Use it by mounting to the PT-RQ13K 3-chip DLP™ projector (sold separately).


* It is recommended that installation and removal of the interface board for the main projector unit should be carried out by a qualified technician. Please contact the place of purchase.

Specifications (Specifications and appearance are subject to change for improvement without notice.)

- Compatible slot : SLOT NX specifications
- Terminals : HDMI 19-pin x2
[Digital signal] HDCP 2.2 compatible, Deep color compliant, for single link only
- Compatible frequencies :
 - Resolution
 - Movie signal resolution : 480i*1/576i*1~ 4,096 x 2,160
 - Still picture signal resolution : 640 x 400~2,560 x 1,600(non-interlace)
 - Dot clock frequency : 25 MHz~594 MHz
- Dimensions (W x H x D) : 151 x 38.5 x 142 mm (5-15/16" x 1-17/32" x 5-19/32")
- Weight : Approx. 350 g*2 (12.3 oz*2)
- Applicable projector : PT-RQ13K (As of November 2015)

*1 Pixel-Repetition signal (dot clock frequency 27.0 MHz) only.
*2 Average value. May differ depending on models.

Dimensions

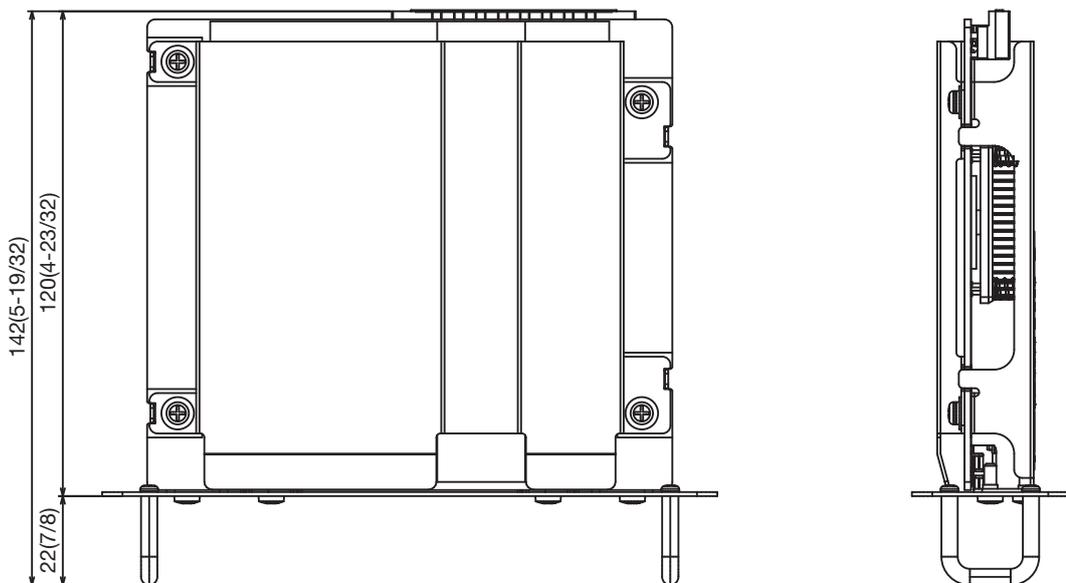

NOTE: This illustration is not drawn to scale.

unit : mm (inch)