

SC-PSW0401R-WIFI


Wireless Presentation Device 0401



- 4K@60Hz 4:4:4 HDR 10, HDMI 2.0
 - Airplay and Miracast Support
 - Smart EDID
 - Automatic input select feature
- It has ideal and wireless presentation feature for meeting and VIP rooms
- SC-SW0401R-WIFI 4 Input (1 Airplay/Miracast, 2 HDMI, 1 USB-C) , 1 4K Output wireless presentation device
- De-embedding audio output,

Features

- Supports HDMI 2.0 input and output ports,
- Supports 18G bandwidth,
- Supports 4K@60Hz 4:4:4 HDR 10 and HDCP 2.2 ,
- Supports Dolby Vision audio
- Supports wireless airplay and miracast,
- Supports balanced stereo audio output,
- Supports USB-C USB 3.0 and 4K video input port and 60Watt charge,
- EDID management,
- Automatic switching, front panel management buttons
- CEC, RS232 control
- 2 x USB Host input

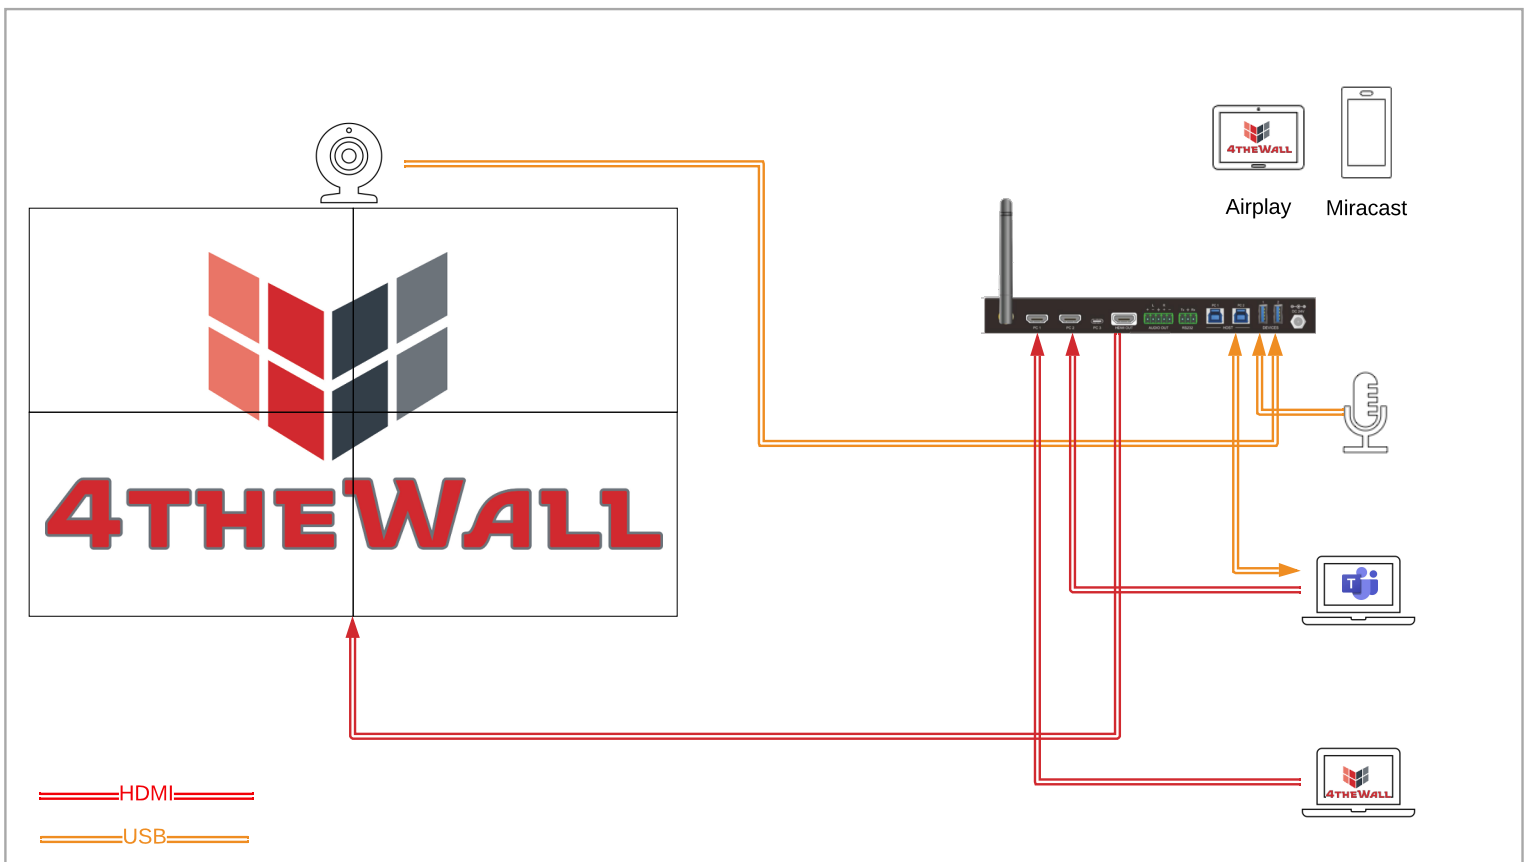

Input and Output

Video Inputs	2 x 4K HDMI 2.0, 1xAirplay/Miracast, 1x 4K USB-C
Video Outputs	1 x 4K HDMI 2.0 video and audio output
Audio Output	1 x Stereo audio output and unified HDMI audio output (Dolby vision)
Resolutions	18G 4K@60 Hz 4:4:4 HDR 10

Network Features

Ethernet	Wifi
IP address features	DHCP, local link , fixed IP

Management Features

Hardware Software Upgrade	USB
Management Options	Web user interface, RS232, API, front panel button

General Features

USB Connection	2 x USB Host connection port (for PC), 2 x Standard USB connection port (for camera etc.)
Power Connection	24V DC 5 Amper, Locked connection port
Working Temperature	0°C~40°C / 32°F~104°F
Humidity Range	20~90% RH
Storage Temperature	-20°C~60°C / -4°F~140°F
ESD Protection	±8kV (air-gap discharge) ±4kV (connection discharge)
Dimensions	238mm × 135mm × 24.5mm - Width/Depth/Height
Weight	825g
Power Value	58.3W
Mounting	Compatible Rack mount (optional part required)

Certifications

AB/ABD	CE / FCC
--------	----------

Package Details

Dimensions (packaged)	370mm x 270mm x 100mm - Width/Depth/Height
Weight (packaged)	1.8kg



Front View



Rear View