

SC-IPKVM0201E-TX

4K IPKVM




SC-IPKVM0201E-TX 4K supported IPKVM is ideal solution for meeting rooms, conference halls or crisis centers.

SC-IPKVM0201E-TX 4K UHD can be used as the backbone of technological development systems. You can move HDMI / VGA signals to your network infrastructure with KVM operating logic with using TCP / IP

- Supports 10.2 Gbps 4K@30Hz 4:4:4 / 4K@60Hz 4:2:0 8 bit
- Supports HDCP 2.2.
- HDMI 2.0 and DVI 1.0
- IPKVM Transmitter

Features

- Supports HDMI 1.4 and HDCP 2.2
- Supports LPCM 2.0/5.1/7.1, Bitstream and HD Bitstream audio format
- Supports video and audio transmission over TCP/IP with Unicast (point to point) or Multicast (from point to multiple point)
- Supports USB keyboard, mouse and storage extension,
- Both Tx and Rx may supported directly by PoE(802.3af)
- It can control from WebGUI, Telnet and front panel buttons

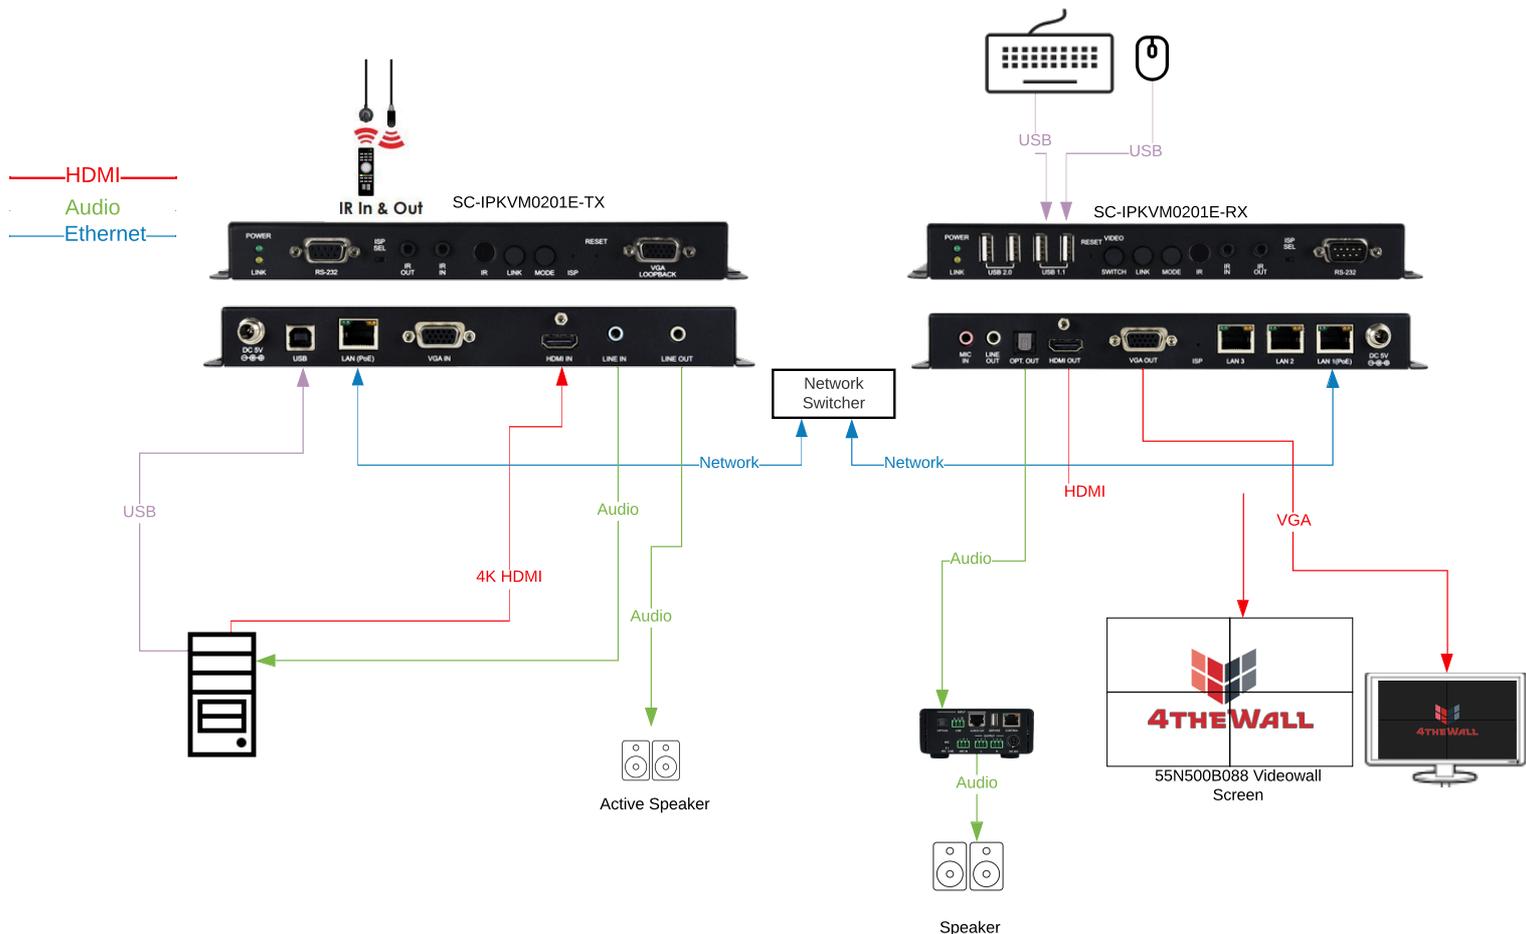

Input and Output

Inputs	1x HDMI , 1x VGA, 1x 3.5mm Stereo audio ,1xRS232 and 1xUSB-B
Input Features	4K@30Hz 4:4:4 / 4K@60Hz 4:2:0 8bit support
Outputs	1x Cat.5e/6/7(LAN) and 1x 3.5mm Stereo audio
Output Features	4K@30Hz 4:4:4 / 4K@60Hz 4:2:0 8 bit, VGA@60Hz - WUXGA@60Hz (RB) support, 10.2 Gbps bandwidth

Network Features

Ethernet	1 x RJ45
IP Address Feature	DHCP, Fixed IP

Management Feature

Hardware Software Upgrade	IP
Management Options	Web GUI, Telnet, Front Panel

General Features

Power Connection	5V DC 2.6A
Working Temperature	0°C~ +40°C
Humidity Range	20% ~ 90%
Storage Temperature	-20°C~ +60°C
ESD Protection	±12kV (air gab discharge) ±8kV (connection discharge)
Dimensions	231.5mm × 108mm × 25mm - Width/Depth/Height
Weight	660g
Power Value	7.15W
Mounting	Desktop

Certifications

EU/USA	CE
--------	----

Package Details

Dimensions (packaged)	231.5mm x 120mm x 25mm - Width/Depth/Height
Weight (packaged)	690g
Package Content	1x SC-IPKVM0201E-TX, 1xRS232 Cable, 5V/2.6A DC Power Adaptor and Power Cable, 1x User Manual



Front View



Rear View