

# SC-SW0401E

## 4K Presentation Device 0401




- 4K@30Hz , HDMI
- 4 x HDMI Input, 1 x HDMI Output
- 3D Content Support
- Fast Switch Function

This matrix switcher has ideal usage features for meeting rooms and VIP rooms.

SC-SW0401E has a feature to display the selected content on the screen

### Features

- HDMI (4K 2K Supported)
- 3D signal switch support
- 4K@30 and HDCP supported,
- Supports feature to HDMI inputs standard and Apple HDCP mode
- Supports audio switch to high definition audio formats (LPCM)
- EDID Support
- IR, RS232, Telnet, Web user interface and ethernet control feature

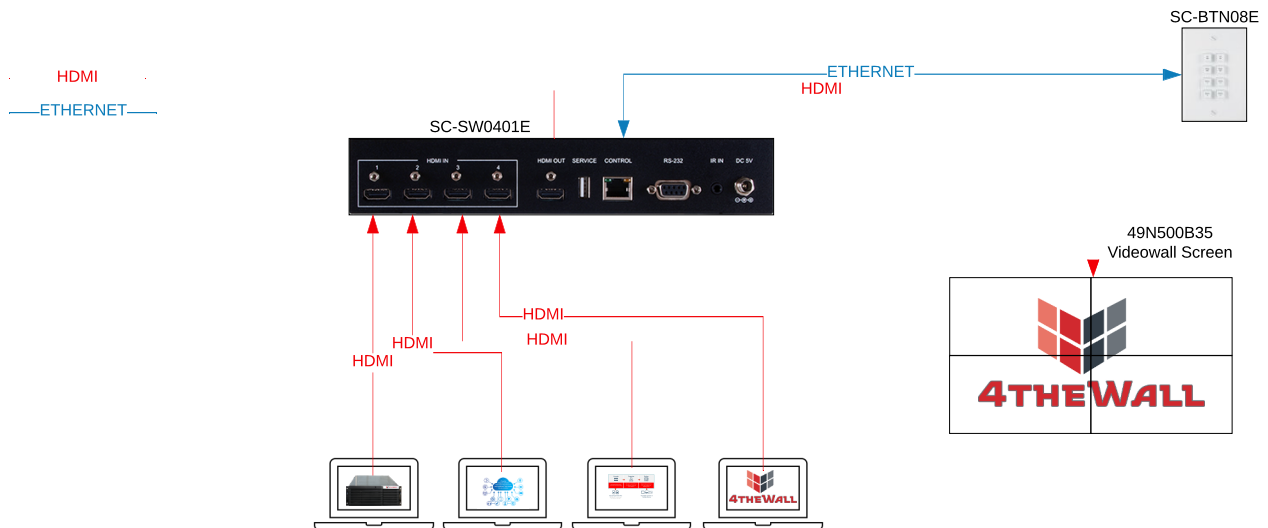

Input and Output	
Video Inputs	4xHDMI, 1xUSB(for service), 1xRJ45 , 1xRS232 and 1xIR
Video Outputs	1 x 4K HDMI and HDBaseT video and audio output
Resolutions	480i~1080p@50/60, 1080p@24, 4K2K (3840x2160@24/25/30, 50/60 YUV_420 & 4096x2160@24, 50/60YUV_420)
Network Features	
Ethernet	IP
IP Address Features	DHCP, Fixed IP
Management Features	
Hardware Software Upgrade	Ethernet
Management Options	Web user interface, RS232, IR, Telnet
General Features	
Power Connection	5V DC 2.6 Amp
Working Temperature	0°C~40°C
Humidity Range	20~90%
Storage Temperature	-20°C~60°C
ESD Protection	±8kV (air gab discharge) ±4kV (connection discharge)
Dimensions	240mm × 104mm × 43mm - Width/Depth/Height
Weight	798g
Power Value	4W
Mounting	1U 19" rack compatible
Certifications	
EU/USA	CE
Package Details	
Dimensions (packaged)	240mm x 111mm x 48mm - Width/Depth/Height
Weight (packaged)	820g
Package Contents	1x SC-SW0401E, 1x Remote Control, 1x Connectors, 1x RS232 Cable ,1x IR Eye, 1x 5V/2.6A DC Power Adaptor, 1x User Manual



Front View



Rear View