SC-SP0102-DP-1.2

4K DisplayPort Splitter




- Supports 21.6 Gbps 4K@60Hz 4:4:4
- DP input HDCP 1.3

SC-SP0102-DP-1.2 4K supported splitter is an ideal solution for meeting rooms, conference rooms and lecture halls

Features

- Supports DP 1.2 and 4K@60Hz 4:4:4, up to HDBR2 connection speed
- DP input- output, HDCP 1.3 support
- Multistream function support

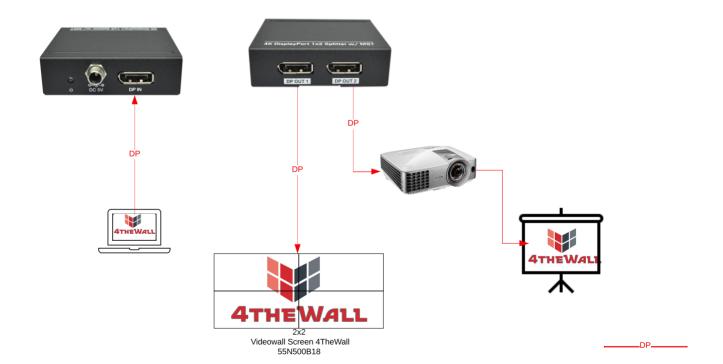

Technical Specifications SC-SP0102-DP-1.2

reclinical opecinications

Inputs 1x DP 1.2a

Input Features Supports 4K@60Hz 4:4:4

Outputs 2x DP 1.2a

Output Features Up to 4K@60Hz 4:4:4

21.6 Gbps bandwidth

Network Features

Input and Output

Ethernet N/A

IP Address Feature N/A

Management Features

Hardware Software Upgrade USB Port

Management Options N/A

General Features

Power Connection 5V DC 1A

Working Temperature -10°C~ +55°C

Humidity Range 10% ~ 90%

Storage Temperature -25°C~ +70°C

ESD Protection ±12kV (air gap discharge) ±8kV (connection discharge)

Dimensions 71mm x 61mm x 21mm - Width/Depth/Height

Weight 115g

Power Value 2W

Mounting Desktop

Certifications

EU/USA CE

Package Details

Dimensions (packaged) 73mm x 61mm x 24mm - Width/Depth/Height

Weight (packaged) 125g

Package Content 1x SC-SP0102-DP-1.2, 5V/1A DC Power Adaptor and Power Cable, 1x User Manual





Front View Rear View

