

# SC-DE0101A

## Audio De-embedder




- 18 Gbps 4K@60Hz , 4:4:4 HDR
- 1 x HDMI 2.0 input, 1 x HDMI 2.0 output
- Supports HDCP 2.2 ,
- EDID Management

This is an ideal de-embedder for meeting rooms and VIP rooms

SC-DE0101A has Analog and stereo output with audio de-embedding and feature to display the selected content on the screen

### Features

- Supports HDMI input, HDCP 2.2 and HDMI output HDCP 1.4
- Supports LPCM 2.0/5.1, Bitstream and PCM audio formats
- Supports HDR, CEC and EDID
- Supports HDMI High Bit Rate (HBR) audio switching

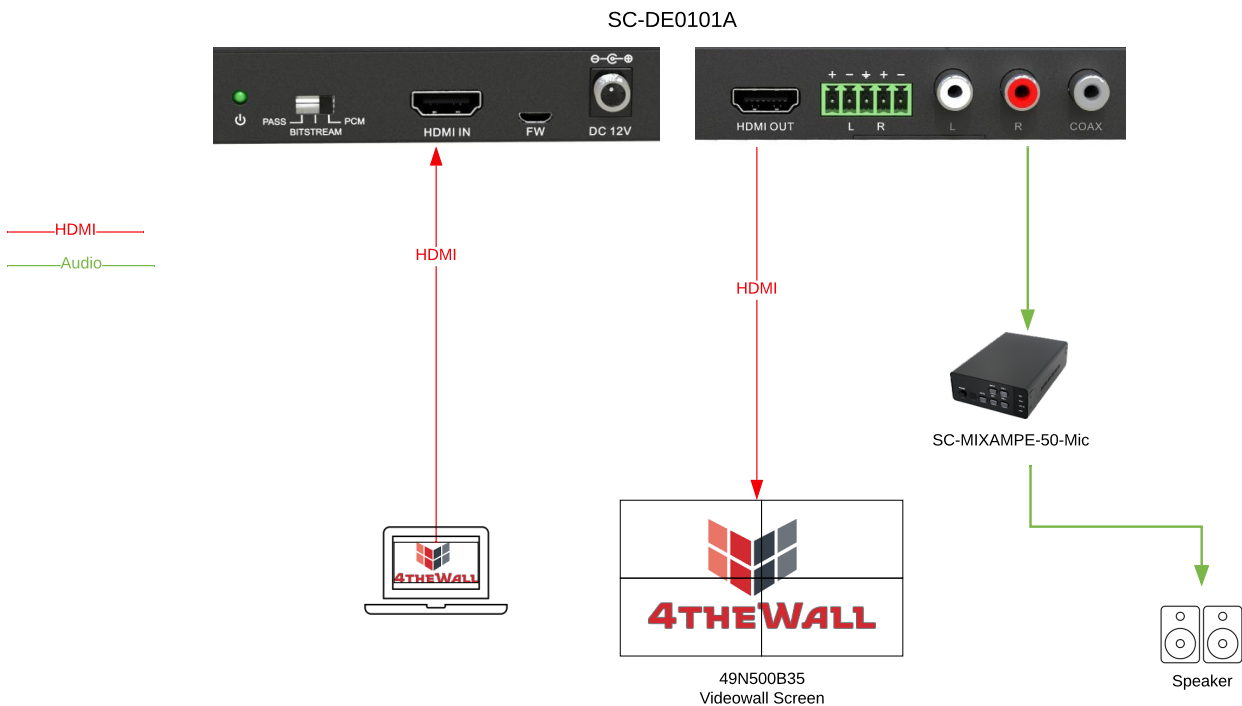

**Input and Output**

Video Inputs	1 x HDMI2.0 and 1xUSB(for service)
Video Outputs	1 x HDMI 2.0 , Stereo audio L/R, Analog audio L+R ve Coax audio output
Resolutions	Supports 4Kx2K@60Hz 4:4:4

**Network Features**

Ethernet	N/A
IP Address Features	N/A

**Management Features**

Hardware Software Upgrade	USB
Management Options	N/A

**General Features**

Power Connection	12V DC 1 Amp
Working Temperature	0°C~40°C
Humidity Range	10~90%
Storage Temperature	-10°C~55°C
ESD Protection	±8kV (air gab discharge) ±4kV (connection discharge)
Dimensions	129mm × 77mm × 21.5mm - Width/Depth/Height
Weight	244g
Power Value	3W
Mounting	1U 19" rack compatible

**Certifications**

EU/USA	CE
--------	----

**Package Details**

Dimensions (packaged)	130mm x 78mm x 23mm - Width/Depth/Height
Weight (packaged)	252g
Package Content	1x SC-DE0101A, 1x 12V/1A DC Power Adaptor, 1x User Manual



Front View



Rear View