SC-PSW0501-HDBO-ASeamless-MV
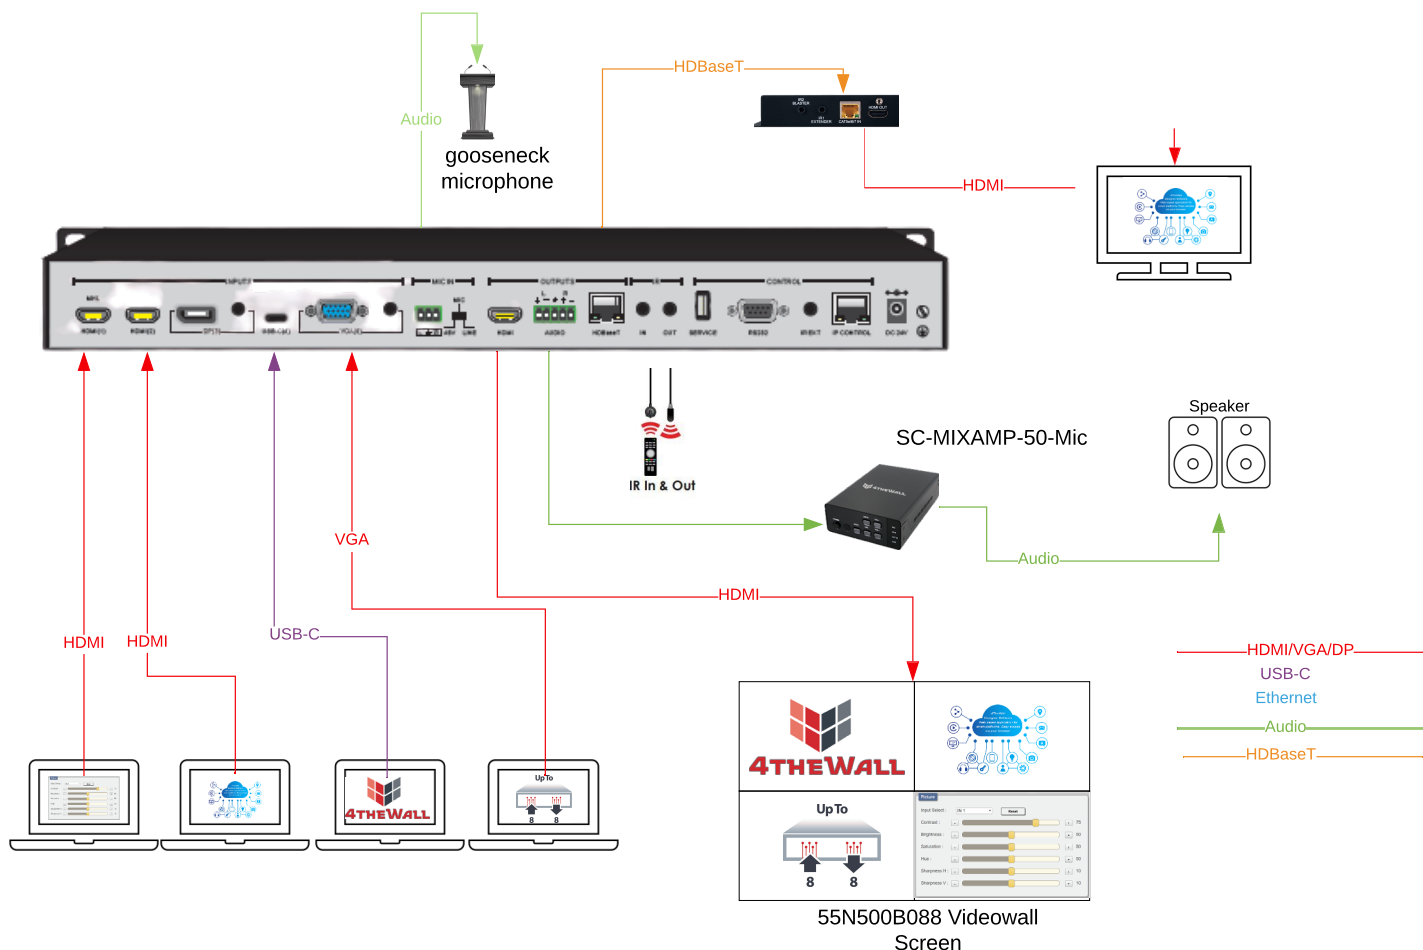
4K Presentation Device 0501

- 4K@30Hz 4:4:4

- 2 x HDMI , 1 x DP, 1xVGA, and 1xUSB-C Input

- 1xHDMI and 1x HDBaseT Output

- Seamless

- Multiview

It has an ideal and seamless switcher feature for meeting rooms and VIP rooms.

SC-PSW0501-HDBO-A-Seamless-MV supports full screen, PIP and multiview layouts with customized designs
Mixable stereo audio input, audio embedding and de-embeddig feature.

Features
- 4K featured, 2 HDMI input and 1 HDMI output,
- Seamless switcher and Multiviewer,
- Supports 4K@30 4:4:4 and HDCP 2.2,
- Automatic scaling feature for inputs,
- Audio embedding and audio mixer feature,
- Automatic input selector on full screen mode,
- Front panel control buttons,
- One of 5 images only can be fullscren on PIP mode
- EDID Support
- Control feature with IR, RS232 , TCP/IP and front panel buttons

Audio

gooseneck microphone

HDBaseT

HDMI

HDMI HDMI

VGA

USB-C

IR In & Out

SC-MIXAMP-50-Mic

Speaker

Audio

HDMI

Up To
8   8

Up To
8   8

55N500B088 Videowall Screen

HDMI/VGA/DP
USB-C
Ethernet
Audio
HDBaseT

www.4thewall.com
info@4thewall.com

Input and Output

Video Inputs	2 x HDMI , 1xUSB-C , 1xVGA , 1xDP
Audio Inputs	Line stereo audio input
Video Outputs	1 x HDMI and 1x HDBaseT video output
Audio Outputs	1 x Mixer saudio output
Resolutions	Maximum 4K@30 Hz 4:4:4 HdbaseT4K 40m and 1080P 70 m

Network Features

Ethernet	1x RJ45 100Mbit
IP Address Features	DHCP, Sabit IP

Management Features

Hardware Software Upgrade	USB
Management Options	RS232, IR, TCP/IP and front panel buttons

General Features

Power Connection	24V DC 3 Amp
Working Temperature	-5˚C~55˚C
Humidity Range	10~90% RH
Storage Temperature	-25˚C~70˚C
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimension	400mm x 42mm x 250mm W/D/H
Weight	1.6 kg
Power Value	N/A
Mounting Type	1U 19" rack compatible

Certifications

EU/US	CE

Package Details

Dimensions (packaged)	400mm x 43mm x 250mm W/D/H
Weight (packaged)	1.7kg
Package Content	1xSC-PSW0501-HDBO-A-Seamless-MV, 1xIR Remote, 1 x Rack Mounting Kit, 1 x Connector Set, 1 x RS232 Cable, 1 x Power Adaptor, 1 x User Manual

Front View   Rear View