

SC-PSW0602E-Seamless-PIP

4K Presentation Device 0602



- 4Kx2K@30Hz
- 6 x HDMI Input, 2 x HDMI Output
- Fast Switch Feature
- Picture and Picture Feature

Ideal multiple screen display feature for small scale videowalls


This device has a seamless switching feature for meeting rooms and VIP rooms

SC-PSW0602E-PIP supports full screen and PIP

This device has matrix output in full screen

Features

- 4K featured, 6xHDMI 2.0 input and 2xHDMI 2.0 output,
- Featured fast switching matrix,
- Supports 4K@30 and HDCP 2.2
- Ability to selected inputs to two outputs at the same time
- Automatic scaling feature for entire inputs,
- Preview function,
- Picture and Picture feature,
- Front panel control buttons,
- WEB GUI, RS232 and Telnet control feature
- EDID management feature

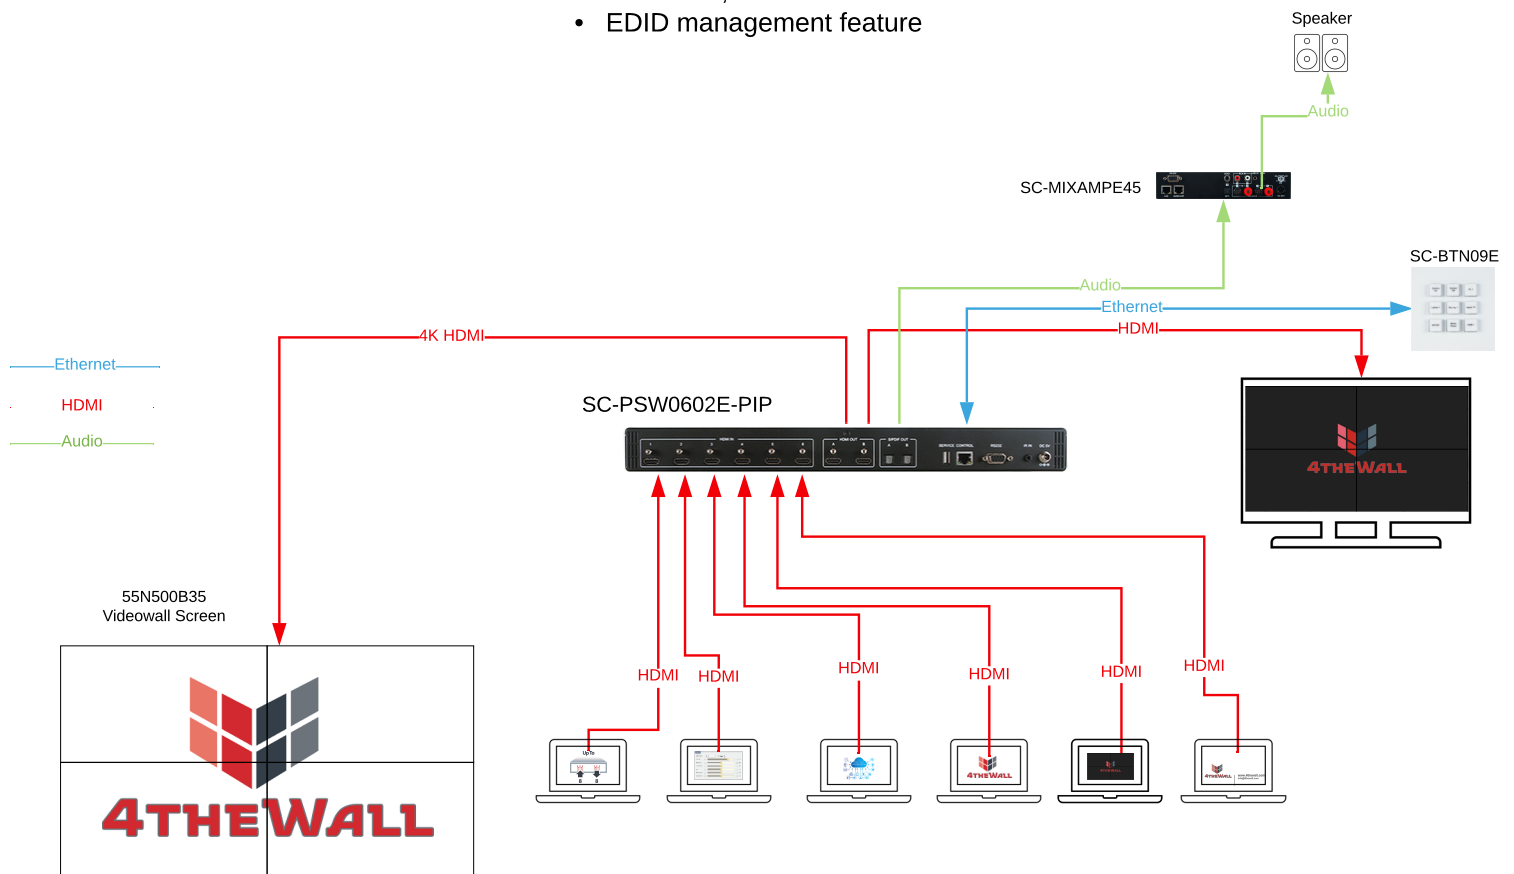

Technical Specifications

SC-PSW0602E-PIP

Input and Output

Video Inputs	6 x 4K@30Hz HDMI
Audio Inputs	HDMI embedded audio input
Video Outputs	2 x 4K@30Hz HDMI and 2 x Optical(S/PDIF)
Audio Output	HDMI embedded audio output
Resolutions	18G Up to 4K@60 Hz 4:4:4

Network Features

Ethernet	1x RJ45 100Mbit
IP Address Features	DHCP, Fixed IP

Management Features

Hardware Software Upgrade	Ethernet
Management Options	Web GUI, API, Front Panel Button, Telnet, RS232

General Features

Power Connection	5V DC 2.6 Amp
Working Temperature	0°C~40°C / 32°F~104°F
Humidity Range	20~90% RH
Storage Temperature	-20°C~60°C / -4°F~140°F
ESD Protection	±8kV (air gap discharge) ±4kV (connection discharge)
Dimensions	438mm × 269mm × 44mm - W/D/H
Weight	1892g
Power Value	11.44W
Mounting Type	Optional Rack Kit

Certifications

EU/US	CE
-------	----

Package Details

Dimensions (packaged)	482.5mm×274mm×49mm- W/D/H
Weight (packaged)	2020g
Package Content	1 x SC-PSW0602E-PIP, 1 x Connector, 1 x 5V/2.6A DC Power Adaptor, 1 x User Manual



Front View



Rear View