

SC-PSW0202E-HDBI-A

4K Presentation Device 0202




- 4K@60Hz
- 1 x HDMI Input and 1 x HDBaseT Input
- 2 x HDMI and 1 Stereo Output
- Receiver

It has a receiver (AV transmission) feature designed for meeting rooms and VIP rooms, crisis centers and data centers.

SC-PSW0202E-HDBI-A can control with front panel buttons ,Web GUI, Telnet and RS232

Features

- Featured 4K and 3D , 1 HDMI, 1 HDBaseT input and 2 HDMI output,
- HDBaseT 2.0 support,
- 4K@60 4:4:4 and HDCP 2.2 ,
- 2x2 Matrix switcher feature,
- Stereo audio output support,
- USB main PC selection with front panel control buttons
- Ability to automatic full screen that contents linked to inputs,
- Control features from front panel buttons ,Web GUI, Telnet and RS232

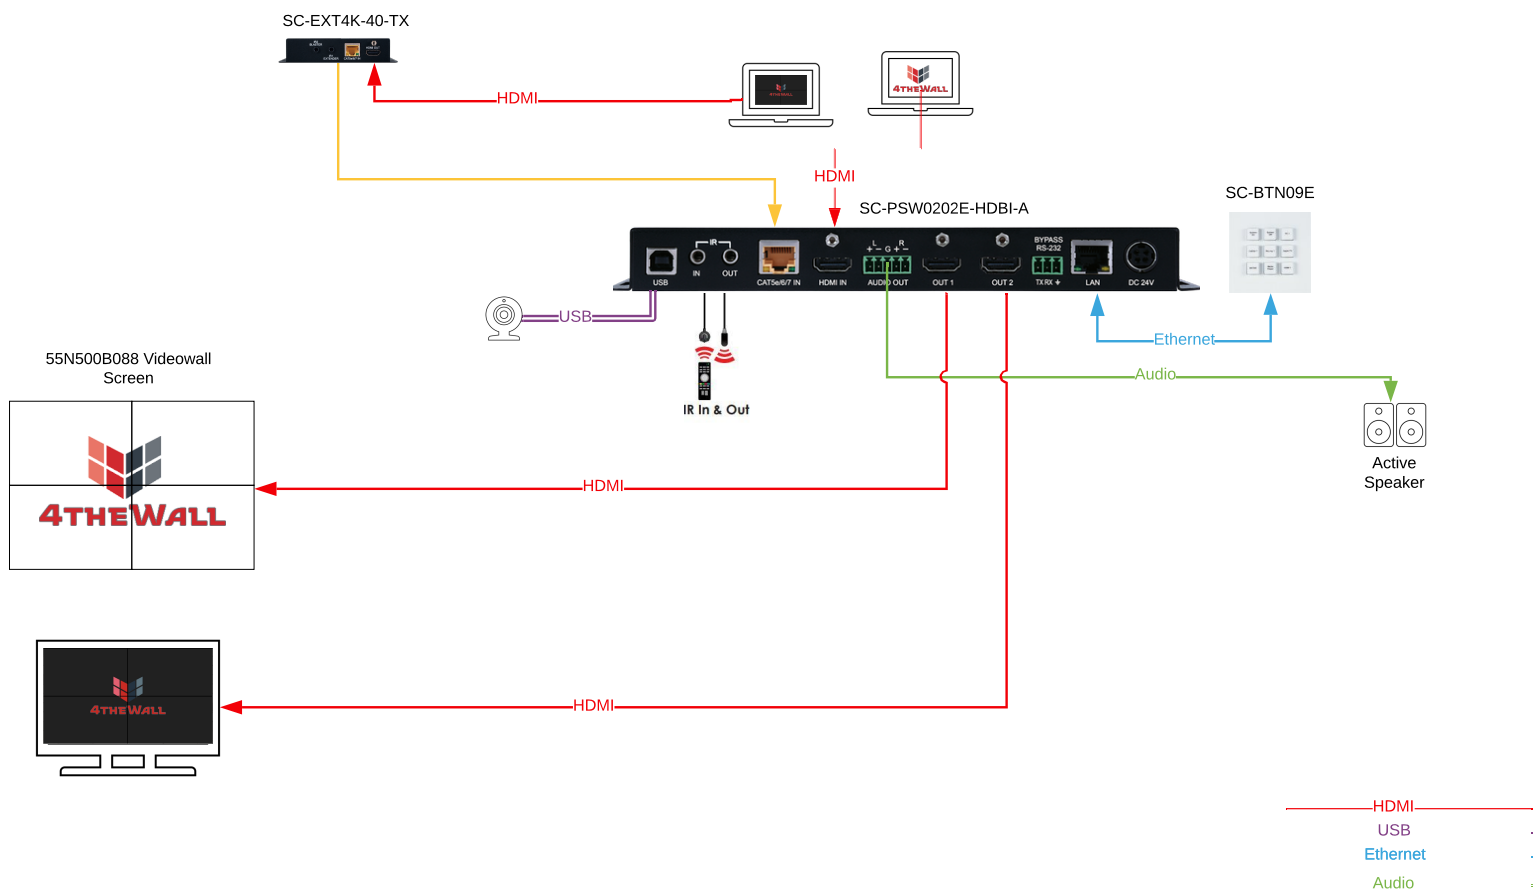

Technical Specification

SC-PSW0202E-HDBI-A

Input and Output

| | |
|---------------|--------------------------------------|
| Video Inouts | 1x HDMI (Type-A), 1 x HDBaseT(RJ45) |
| Audio Inputs | - |
| Video Outputs | 2 x HDMI |
| Audio Outputs | 1 x HDMI and 1 x analog audio output |
| Resolutions | Up to 4K@60 Hz 4:4:4 |

Network Features

| | |
|---------------------|----------------|
| Ethernet | 1x RJ45 |
| IP Address Features | DHCP, Fixed IP |

Management Features

| | |
|---------------------------|--|
| Hardware Software Upgrade | USB |
| Management Options | Front Panel Buttons, Web GUI, RS232 and Telnet |

General Features

| | |
|---------------------|---|
| Power Connection | 24V/ DC 3.75 Amp |
| Working Temperature | 0°C~40°C |
| Humidity Range | 20~90% RH |
| Storage Temperature | -20°C~60°C |
| ESD Protection | ±8kV (air-gap discharge) ±4kV (connection discharge) |
| Dimensions | 231.5mm × 165mm × 25mm - W/D/H |
| Weight | 895g |
| Power Value | 22.33W |
| Mounting Type | 1U 19" rack cabinet compatible |

Certification

| | |
|--------|----------|
| EU/USA | CE / FCC |
|--------|----------|

Package Details

| | |
|-----------------------|--|
| Dimensions (packaged) | 231.5mm x 174mm x 44mm - W/D/H |
| Weight (packaged) | 928g |
| Package Content | 1xSC-PSW0202E-HDBI-A, 1x Connector, 1xIR Extender Cable, 1x IR Cable, 1x User Manual |



Front View



Rear View