




Electrical lifting
system with
remote control

HEIGHT ADJUSTMENT



Height Adjustable Interactive Touch Table

With height adjustment feature, create collaborative experiences, add value to any environment, bringing technology to the user or presenter. It is also suitable for disable people.

Main features

- Projected capacitive (PCAP) 10-point multi-touch
- Height adjustment electrical lifting column
- Power & data feed from rear panel or floor through the base plate
- Anti-Glare protection glass over the screen
- Ergonomic and compact structure
- User friendly, easy for maintenance



Touch technology - Capacitive

The Projective Capacitive (PCAP) touch technology with 12 touch points ensures a seamless and accurate touch response. With its AMVA3 LED panel, it offers exceptional colour performance, high contrast and wide viewing angles.


This technology uses a sensor-grid of micro-fine wires integrated into the glass that covers the screen. Touch is detected because electrical characteristics of the sensor grid change when human finger is placed on the glass. Thanks to the glass overlay this technology is highly durable, and the touch function remains unaffected even if the glass is scratched.

It offers perfect picture performance and will work with human finger (also latex gloved) and stylus-pen.



Smart Design

The sleek look is achieved with a striking aluminium surround and edge-to-edge vandal proof tempered glass front panel



Plug and Play

If there is no internet access available the screen can still be updated thanks to their backup USB update option.



24/7 Commercial Use

A commercial grade panel, with a lifespan of 50.000 hours and high quality compenets ensure that this display can be in constant use 24/7.



Screen Size	32"	43"	49"	55"	65"
Model Number	M32ZN	M43ZN	M49ZN	M55ZN	M65ZN

Technical Specifications

Screen

Screen Size	32" 43" 49" 55" 65"
Resolution	32" 43" 1920x1080 - 49" 55" 65" 4K
Brightness	450 cd/m2
Aspect Ratio	16:9
Contrast Ratio	5000:1
Viewing Angle	178:178
Response Time	8ms

Touch


Touch Technology	PCAP - Projected Capacitive
Touch Points	Multi Touch
Responce Time	8 ms

Height Adjustment Lifting Column

Movement	Vertical (Up/Down)
Control	By Buttons (Up/Down)
Speed	Max speed: 38 mm/s
Lifting strength	700N
Locking System	Automatic Locking when engine not working
Engine Type	Electrical
Remote control	Available

Other

Application	indoor
Colour	RAL 7047 Grey (optional)
Installation	Floor bolting / Free Standing

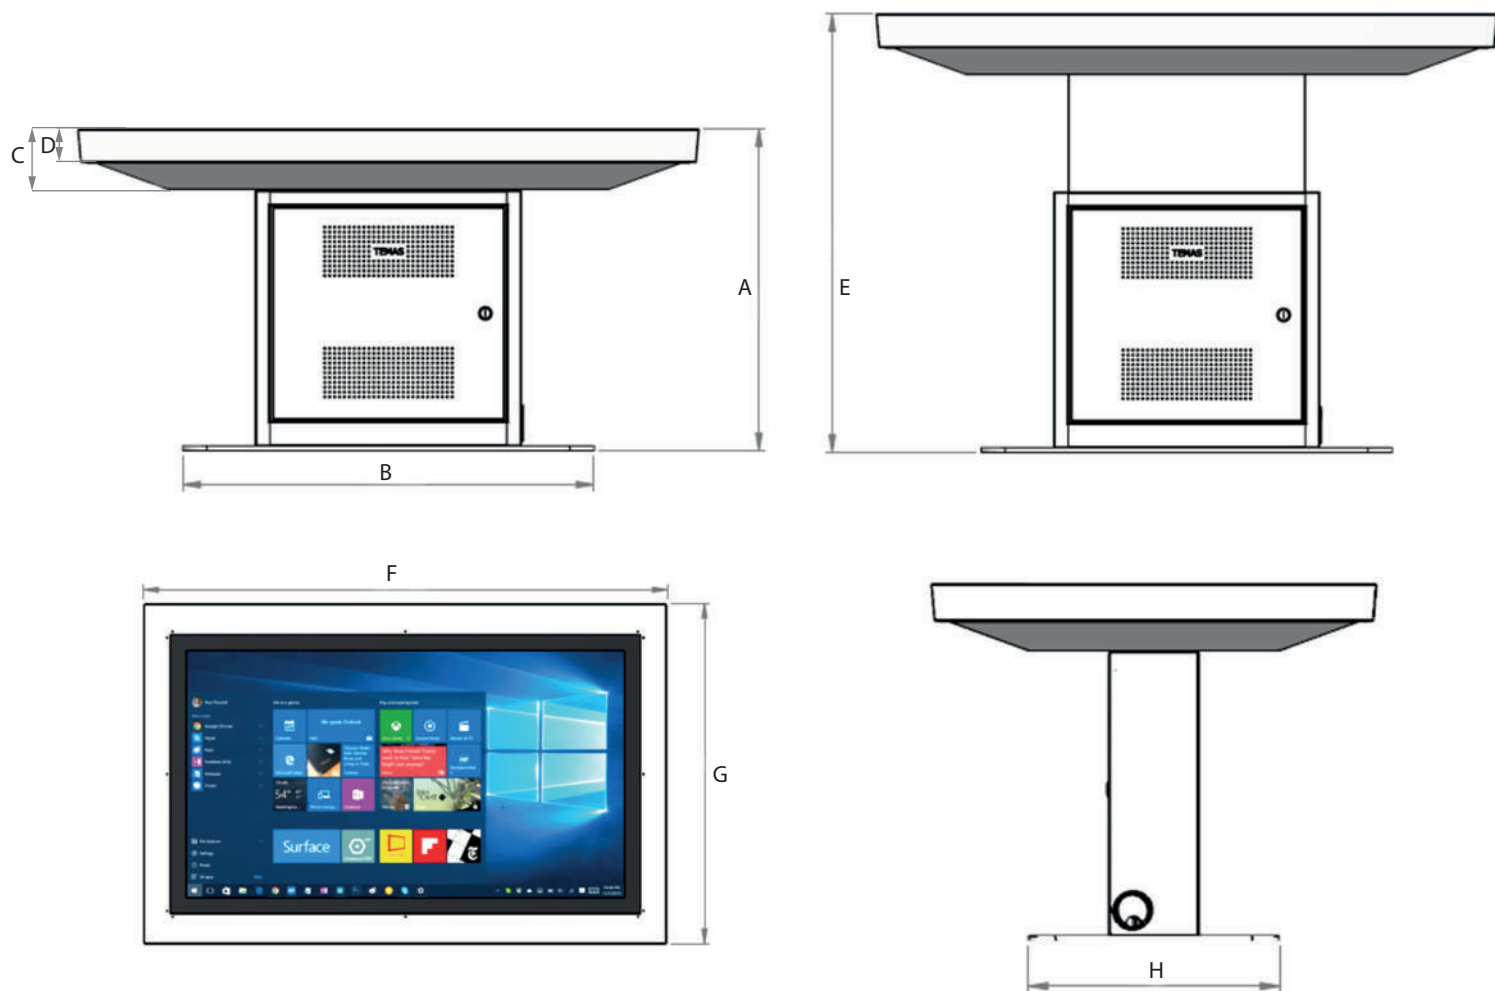

Dimension (mm)

Size	Model Name	A	B	C	D	E	F	G	H
32"	M32ZN	665	850	125	70	905	878	601	470
43"	M43ZN	665	850	125	70	905	1117	739	470
49"	M49ZN	665	850	124	70	905	1284	835	470
55"	M55ZN	665	850	125	70	905	1424	917	470
65"	M65ZN	665	850	125	70	905	1588	986	470