

USB2.0 PTZ Camera




AMC-M1001V3


Features

- Latest CMOS sensor, up to 1080P30;
- 10X optical zoom;
- Advanced 2D/3D noise reduction algorithm, excellent noise control;
- Smooth operation, accurate positioning;
- Support H.264, H265, MJPEG compressed video output, standard UVC protocol;
- USB 2.0 output;
- Support USB and remote control to control the camera;
- Power consumption <5W;
- Base with tripod thread interface for tripod installation.

Dimensions

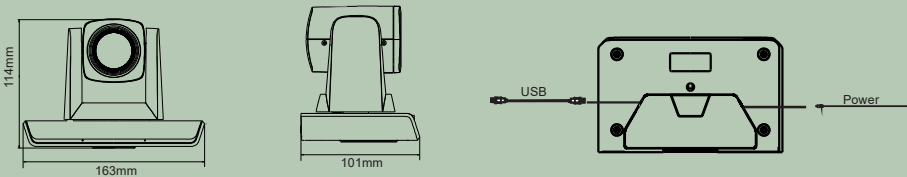

Accessories



Wall Bracket

Technical Data

Model	AMC-M1001V3
Camera	
Image Sensor	1/2.8" CMOS, 2.16MP
Optical Zoom	10X
Focal Length	f=5.15 ~ 47.38mm
Iris	F2.38
FOV	62.2°~7.08°
Focus	Auto, Manual, PTZ Trigger, One Push Trigger
Exposure	Auto, Manual, Shutter Priority, Brightness Priority
White Balance	Auto, Manual, One Push Trigge, Auto Tracking
AGC	Auto, Manual
Shutter Speed	1/60~1/10,000s
BLC	Support
DNR	2D/3D
SN Ratio	≥50dB
PTZ	
Pan Angle	-90°~+90°
Tilt Angle	-30°~+90°
Pan Speed	15°/S
Tilt Speed	10°/S
Preset Number	32
Interface	
Audio Port	LINE IN
IR Remote Control	Support
USB	
Max Image Size	1080P30
Image Compression	H.264/H.265/MJPEG
UVC Protocol	USB2.0, UVC 1.0
UVC PTZ Control	Support
General	
Power	DC12V
Power Consumption	< 5W
Operating Environment	Temperature: 0°C ~ +40°C, Relative Humidity: 10%RH ~ 90 %RH
Storage Environment	Temperature: -20°C ~ +60°C, Relative Humidity: 10%RH ~ 95 %RH
Dimensions (L×W×H)	163mm×101mm×114mm
Weight	0.6KG