

4KP60 PTZ Camera




AMC-G500

Features

- CMOS 8.46MP, up to 4KP60;
- Wide 81° HFOV;
- USB2.0 with UVC and UAC protocols, up to 4KP30 video output, and support POE;
- Support RS-232 In, RS-232 Out control interface and VISCA protocol;
- 1 channel Line In;
- High precision, smooth rotation, quiet PTZ.

Dimensions

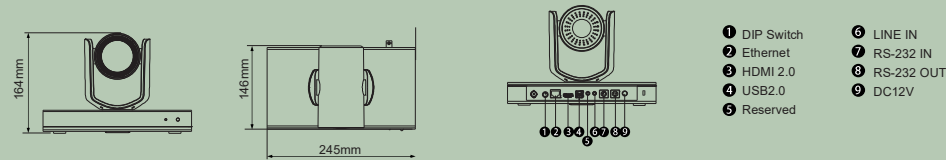

Technical Data

Model	AMC-G500
Camera	
Image Sensor	1/2.8" CMOS, 8.46MP
Lens	12X, f=3.4mm ~ 40.3mm, F1.8 ~ F3.6
FOV	81° ~ 7.6°
Image	Auto focus/auto exposure/auto white balance
SNR	2D & 3D DNR, ≥55dB
Video Output Format	4KP60/P50/P30/P25, 1080P60/P50/P30/P25, 720P60/P50
Image Compression	H.264/H.265/MJPEG
BLC/WDR	Support
PTZ	
Pan Angle	-130°~+130°, 0.2°~80°/S
Tilt Angle	-30°~+90°, 0.2°~60°/S
Preset Number	64
Menu	Support
Interface	
HDMI	1×HDMI 2.0, Video resolution:4KP60/P50/P30/P25, 1080P60/P50/P30/P25, 1080I60/I50, 720P60/P50
Audio Input	1×LINE IN, 3.5mm
USB Interface	1×USB 2.0,
Video Forma	MJPEG/H.264, 4KP30/P25, 1080P30/P25, 720P30/P25, 360P30/P25
Network Interface	1×10M/100M/1000M RJ45 POE Supported
Video Output Format	Max 4KP60
Image Compression	H.264/H.265/MJPEG
Audio Compression	AAC
Network Protocol	RTSP/ONVIF/RTMP/HTTP/TCP UDP/RTP
Dual Stream	Main/Sub
General	
Control Protocol	VISCA
Addresses	1-6
Power	DC12V
Power Consumption	<18W
Operating Environment	Temperature: 0°C ~ +40°C, Relative Humidity: 10%RH ~ 90 %RH
Storage Environment	Temperature: -20°C ~ +60°C, Relative Humidity: 10%RH ~ 95 %RH
Dimensions (L×W×H)	245mm×146mm×164mm
Weight	<2KG