


COM SLIM 30 / COM SLIM 50 column loudspeakers

Package contains:


Loudspeaker	1 pc.
Bracket	2 pcs.
Cable gland	2 pcs.
Fixing tool	1 pcs.
Screw	2 pcs.
Washer	4 pcs.

①

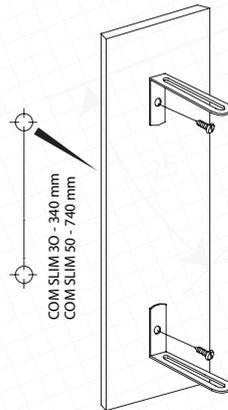


Fix mounting bracket on solid surface (recommended distance between brackets center holes 340 mm for COM SLIM 30 and 740 mm for COM SLIM 50)


②

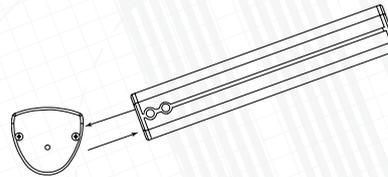

COM SLIM 30



COM SLIM 50



Remove the bottom cover and install the cable glands. Insert the cable into the cable gland and connect the cable to terminal block. Select desired power from table (transformer power tap meanings and wire colors are marked on the label). Close bottom cover.

③



Mount speaker with screws to brackets.

Please pay attention: Mount the loudspeaker on the reliable base only.