COM 20/COM 40 column loudspeakers

Package contains:

Loudspeaker	1pcs.
Bracket	1pcs.

①

8 mm
8 mm
25 mm
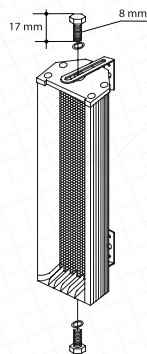45 mm
90 mm
Ø 5 mm
56 or 31
174 mm

②

White
Green
Black

COLOR	COM 20	COM 40
White	20 W	40 W
Green	10 W	20 W
Black	COM	COM

③

17 mm
8 mm

Fix mounting bracket on solid surface (recommended distance between brackets center holes 56mm for COM 40 and 31mm for COM 20)

Connect speaker to signal line via block terminal. (Select desired power from table)

Mount speaker with screws to brackets.

Please pay attention: Mount the loudspeaker on the reliable base only.