

Display any content in ultra-high definition with incredibly rich color on slim, efficient signage.


Through intelligent UHD upscaling technology, Samsung's QBR-B, QBT-B series performs edge restoration and noise reduction to deliver UHD picture quality even with lower resolution content. Backed by Tizen 4.0, the QBR-B, QBT-B series also provides reinforced capability with multiple web formats and secured protection. Additionally, its new slim design simplifies wall mounting and ensures seamless installation.

Highlights

- Engage customers with lifelike images through ultra high-definition resolution
- Deliver UHD-level picture quality even with lower resolution content through Crystal Processor 4K supporting innovative UHD upscaling technology
- Dynamic Crystal Display allows viewers to enjoy a wider spectrum of colors, up to one billion shades
- Symmetrical, slim design simplifies installation and complements any environment
- Secure, PC-free operation through Knox and rigid three-layer protection

Industry trend

With visual display technology continually improving, viewers have developed an ever-growing expectation for better – and bigger – picture quality. Users, more than ever, want to captivate customers with truly lifelike images and gain a competitive edge over their industry peers with best-in-class displays. This is reflected in the fact that UHD resolution continues to grow in popularity, becoming an essential way for brands to impress customers amid a wider variety of stunning, aesthetical visuals and content. This trend is coupled with demand for larger screen sizes, particularly in the 75-inch and above category, enabling businesses to differentiate themselves and display content in a more impactful way than ever before.

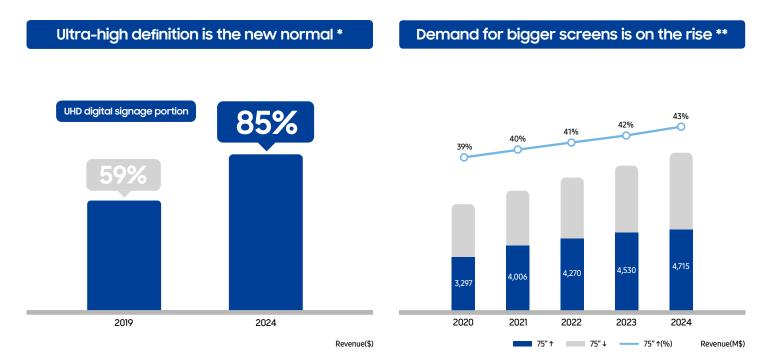

*,** Source: Omdia, Public Displays Market Tracker Q1 2020, July 2020. Revenues in USD Millions. Does Not Include Consumer TVs Used as Public Displays. Not an Endorsement of Samsung Electronics Co. Ltd. Any Reliance on these results is at the third-party's own risk.

Why Samsung's QBR-B, QBT-B series?

Samsung's superior visual display technology has positioned them as the industry leader in the digital signage market for a decade* and Samsung brand having been No.1 in sales for 12 consecutive years in the display market**. As an expert in picture quality in the display industry, Samsung is able to deliver best-in-class picture quality through their QBR-B, QBT-B series. The signage provides rich and flawless colors, sleek and durable design, powerful performance through SSSP 6 and secured protection. Samsung's QBR-B, QBT-B series is also able to upscale the low resolution content to UHD picture quality. For commercial displays, this technology advancement means highly visible signage with unmatched accuracy to help capture the attention of potential customers. It also means savings both in cost and time for businesses who can produce content more inexpensively at a lower resolution and still display it in stunning UHD quality.

- * Results based on Omdia(former IHS) report "Public Displays Market Tracker", 2009 2018. Information is not an endorsement of Samsung. Any reliance on these results is at the third party's own risk.
- ** According to market research company "Omdia". Ranking in terms of shipments. Results are not an endorsement of Samsung. Any reliance on these results is at the third-party's own risk











Key features

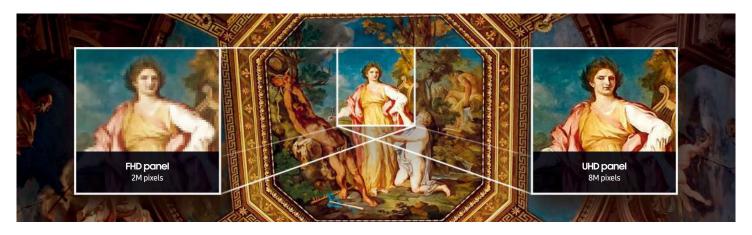

Incredible UHD picture quality

Samsung's new QBR-B, QBT-B series is able to capture customer attention by providing an incredibly clear picture, showcasing lifelike images and intricate details better than ever before thanks to ultra high-definition 4K resolution.

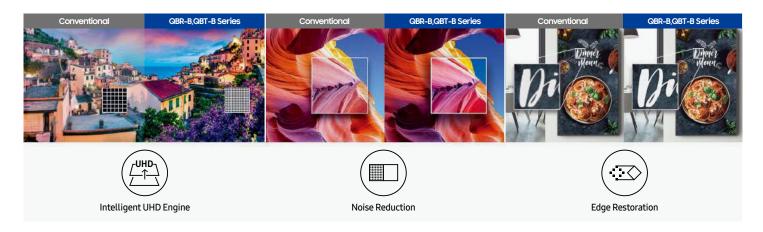

Crystal Processor 4K

Samsung's global leadership in display technology and picture quality spans more than a decade. Thanks to superior semi-conductor technology, Samsung has developed the powerful video processor available. Additionally, intelligent UHD upscaling technology is a cutting-edge solution based on Samsung's proprietary UHD Processor that allows content developed at a lower resolution to be elevated to UHD-level quality. It also performs edge restoration and noise reduction to optimize on-screen text and imagery with crisp edges and fine detail.



Dynamic Crystal Display

Dynamic Crystal Display is what brings the incredible, lifelike color to Samsung displays. Using 10-bit processing, the displays are able to showcase a wider spectrum of colors — up to a billion different shades — capturing subtle differences for flawless color expression, critical to businesses in ensuring brand consistency across communication channels. The QBR-B, QBT-B series also features HDR+ functionality that converts standard definition (SDR) content to HDR quality for sharper contrast and more vivid colors.

Key features



Slim and symmetrical design

The all-new slim and symmetrical design of the QBR-B, QBT-B series significantly simplifies wall mounting the display and ensures installation is a seamless process. The display's power inlet direction has been redesigned to sit flush against the wall. The new design sets guarantees a long life cycle ensuring the QBR-B, QBT-B series willstand the test of time.



Clean cable management

In a corporate or retail environment, the back of a display is often visible to customers. With the QBR-B, QBT-B series' new cable guide feature retailers can tuck messy cables away from view. This allows for a clean and more visually-appealing customer shopping experience.

* Rear panel of display may vary by model.



Powerful, all-in-one solution

The Samsung Smart Signage Platform (SSSP) is an open-source, all-in-one solution embedded in Samsung Smart signage that simplifies installation and maintenance. With SSSP, there is no need for any external devices to communicate with the server or play digital media enjoying easy development, reinforced capability with multiple web formats, and secured protection.



Workspace secured by Knox

Workspace is a powerful new feature fortified by proprietary Knox security technology allowing users to create an enhanced virtual collaboration workspace without needing a PC in the room, or any physical connection. Simply connect a keyboard and mouse to the display and immediately get to work accessing a PC remotely or web based cloud services such as Microsoft Office 365 and VMWare Horizon.



Industry standard certified

QBR-B displays are EMC class B compliant, providing a safe and healthy viewing environment by meeting strict standards of electromagnetic wave emission and assuring reliable operation even near other electronic equipment. The displays are also registered by EPEAT, the global ecolabel for IT, confirming the hardware is sustainable for the full product lifecycle, from design and production to energy use and recycling.

* EMC class vary by model.

Specifications

	Model		QB43R-B	QB50R-B	QB55R-B
		Class	43	50	55
Panel	Diagonal Size	Measured	42.5	49.5	54.6
	Туре		Edge LED BLU	Edge LED BLU	Edge LED BLU
	Resolution		UHD (3840 x 2160)	UHD (3840 x 2160)	UHD (3840 x 2160)
	Pixel Pitch (mm)		0.2451 x 0.2451	0.285 x 0.285	0.315 x 0.315
	Active Display Area		941.184 (H) x 529.416 (V)	1095.84(H) x 616.41(V)	1209.6(H) x 680.4(V)
	Brightness (Typ.)		350	350	350
	Contrast Ratio (Typ.)		4000:1	4000:1	4000:1
	Viewing Angle (H/V)		178/178	178/178	178/178
	Response Time (G to G)		8ms(Typ.)	8ms(Typ.)	8ms(Typ.)
	Display Colors		16.7M(True Display) 1.07B(Ditherd10bit)	16.7M(True Display) 1.07B(Ditherd10bit)	16.7M(True Display) 1.07B(Ditherd10bit)
	Color Gamut		92% (DCI-P3, CIE1976)	92% (DCI-P3, CIE1976)	92% (DCI-P3, CIE1976)
	Operation Hour		16/7	16/7	16/7
	Haze		2%	2%	2%
	Dynamic C/R		MEGA	MEGA	MEGA
Disalan	H-Scanning Frequency		30 ~ 81kHZ	30 ~ 81kHZ	30 ~ 81kHZ
Display	V-Scanning Frequen	cy	48~75HZ	48~75HZ	48 ~ 75HZ
	Maximum Pixel Freq	uency	594MHz	594MHz	594MHz
Sound	SpeakerType		Built in Speaker (10W + 10W)	Built in Speaker (10W + 10W)	Built in Speaker (10W + 10W)
		RGB	DVI-D	DVI-D	DVI-D
		VIDEO	HDMI 2.0 (2)	HDMI 2.0 (2)	HDMI 2.0 (2)
	INPUT	HDCP	HDCP2.2	HDCP2.2	HDCP2.2
		AUDIO	Stereo Mini Jack, DVI/HDMI/Audio(Common)	Stereo Mini Jack, DVI/HDMI/Audio(Common)	Stereo Mini Jack, DVI/HDMI/Audio(Common)
		USB	USB 2.0 x 2	USB 2.0 x 2	USB 2.0 x 2
C		RGB	N/A	N/A	N/A
Connectivity	OLITPUT	VIDEO	N/A	N/A	N/A
	OUTPUT	AUDIO PouverOut	Stereo Mini Jack	Stereo Mini Jack	Stereo Mini Jack
		Power Out USB	N/A N/A	N/A N/A	N/A N/A
	EXTERNAL CONTRO		N/A RS232C(in/out) thru stereo jack, RJ45	N/A RS232C(in/out) thru stereo jack, RJ45	N/A RS232C(in/out) thru stereo jack, RJ45
	EXTERNAL SENSOR		RS252C(III/OUL) UTU Stereo Jack, R945	RS232C(III/OUL) UITU Steleo Jack, R345	RS232C(III/out) till a stereo Jack, R345 IR
	Tuner		N/A	N/A	N/A
	Туре		Internal	Internal	Internal
	PowerSupply		AC100 - 240 V, 50/60 Hz	AC100 - 240 V, 50/60 Hz	AC100 - 240 V, 50/60 Hz
		Max [W/h]	110	143	143
		Typical [W/h]	67	86	108
Power		Rating [W/h]	100	130	130
	Power Consumption	BTU (Max)	375.1	487.6	487.6
		Sleep mode	0.5	0.5	0.5
		Off mode	N/A	N/A	N/A
	Dimension (mm)	Set	967.5 x 557.7 x 48.3	1121.4 x 643.9 x 46.3	1235.1 x 707.9 x 46.3
	Difficultion (min)	Package	1095 x 676 x 151	1269 x 784 x152	1402 x 858 x 163
	Weight (kg)	Set	10	13.4	18.1
Mechanical		Package	13.3	17.6	23.6
Spec	VESA Mount		200 x 200	200×200	200 x 200
	Protection Glass		N/A	N/A	N/A
	Stand Type Bezel Width (Top/Sic	do (Pot) (mm)	Foot Stand (Optional) 9.2mm(U/L/R),11.2mm(B)	Foot Stand (Optional) 9.2mm(U/L/R),11.2mm(B)	Foot Stand (Optional) 9.2mm(U/L/R),11.2mm(B)
	Operating Temperat		0°C~ 40°C	9.21111(0/L/K),11.21111(b) 0°C~40°C	9.21111(0/L/R), 11.21111(B) 0°C~ 40°C
Operation	Humidity	uic	10~80%	10~80%	10~80%
	Trainidity		UHD Signage Display	UHD Signage Display	UHD Signage Display
	Key		Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0	Slim & Light Signage with Built-in MaqicInfo S6, SSSP 6.0	Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0
	Orientation		Landscape / Portrait	Landscape / Portrait	Landscape / Portrait
			Temperature Sensor, Pivot Display, Clock Battery	Temperature Sensor, Pivot Display, Clock Battery	Temperature Sensor,Pivot Display, Clock Battery
		H/W	(168hrs Clock Keeping), Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi	(168hrs Clock Keeping), Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi	(168hrs Clock Keeping), Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi
	Special		Auto Source Switching & Recovery,	Auto Source Switching & Recovery,	Auto Source Switching & Recovery,
		S/W	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)	LFD Home UI, Button Lock, Hot key option, Plug&Play (Initial Setting)
		Processor	Cortex A721.7GHz Quad-Core CPU	Cortex A721.7GHz Quad-Core CPU	Cortex A721.7GHz Quad-Core CPU
		On-Chip Cache	L1 Instruction Cache : 48KB	L1 Instruction Cache : 48KB	L1 Instruction Cache : 48KB
Feeboor		Memory	L1 Data Cache : 32KB L2 Cache : 2MB	L1 Data Cache : 32KB L2 Cache : 2MB	L1 Data Cache : 32KB L2 Cache : 2MB
Feature		ClockSpeed	1.7GHz	1.7GHz	1.7GHz
		Main Memory	2.5GB	2.5GB	2.5GB
		Interface	LPDDR41.5GHz 64bit Graphic resolution : 1920 x 1080	LPDDR41.5GHz 64bit Graphic resolution : 1920 x 1080	LPDDR41.5GHz 64bit Graphic resolution : 1920 x1080
	Internal Player (Embedded H/W)	Graphics	Output resolution: 3840 x 2160	Output resolution: 3840 x 2160	Output resolution : 3840 x 2160
			(Scale up from graphic processing result.) 8GB	(Scale up from graphic processing result.) 8GB	(Scale up from graphic processing result.) 8GB
		Storage (FDM)	(3.88GB Occupied by O/S, 4.12GB Available)	(3.88GB Occupied by O/S, 4.12GB Available)	(3.88GB Occupied by O/S, 4.12GB Available)
		Multimedia	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC, UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9
			*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG	*Audio Decoder: AC3 (DD), MPEG
		IO Ports	USB 2.0	USB 2.0	USB 2.0
		Operating System	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)
	Safety		60950-1	60950-1	60950-1
Certification	EMC		Class B	Class B	Class B
	Environment		ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)	ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise) ('20.1~')	ENERGY STAR 8.0, Epeat 802.1x(WPA2 Enterprise)
	Security		: EAP-TLS, EAP-TTLS, EAP-PEAP	: EAP-TLS, EAP-TTLS, EAP-PEAP	: EAP-TLS, EAP-TTLS, EAP-PEAP
	Included		Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries
Accessories	Stand		Power Cord, Remote Controller, Batteries STN-L4355F	Power Cord, Remote Controller, Batteries STN-L4355F	Power Cord, Remote Controller, Batteries STN-L4355F
		Mount	WMN4070SE (Land Only)	WMN4070SE (Land Only)	WMN4070SE (Land Only)
	Optional		WMN750ME	WMN750ME	WMN750ME
		Specialty Modia Player	CML400XK	CML400XK	CML400XK
		Media Player	N/A	N/A	N/A

Specifications

	Model		QB65R-B	QB75R-B
	Diamond Cina	Class	65	75
	Diagonal Size	Measured	64.5	74.5
	Туре		Edge LED BLU	Edge LED BLU
	Resolution		UHD (3840 x 2160)	UHD (3840 x 2160)
	Pixel Pitch (mm)		0.372 x 0.372	0.42975 x 0.42975
	Active Display Area		1428.48 (H) x 803.52 (V)	1650.24 (H) x 928.26 (V)
Panel	Brightness (Typ.)		350	350
	Contrast Ratio (Typ.)		4000:1 178/178	4000:1 178/178
	Viewing Angle (H/V) Response Time (G to G)		8ms(Typ.)	8ms(Typ.)
			16.7M(True Display)	16.7M(True Display)
	Display Colors		1.07B(Ditherd 10bit)	1.07B(Ditherd 10bit)
	Color Gamut		92% (DCI-P3, CIE1976)	92% (DCI-P3, CIE1976)
	Operation Hour		16/7	16/7
	Haze Dynamic C/R		2% MEGA	2% MEGA
	H-Scanning Frequency		30 ~ 81kHZ	30 ~ 81kHZ
Display	V-Scanning Frequency		48~75HZ	48~75HZ
	Maximum Pixel Frequency		594MHz	594MHz
Sound	SpeakerType		Built in Speaker(10W+10W)	Built in Speaker(10W+10W)
	INPUT	RGB	DVI-D	DVI-D
		VIDEO	HDMI 2.0 (2)	HDMI 2.0 (2)
		HDCP	HDCP2.2	HDCP2.2
		AUDIO	Stereo Mini Jack, DVI/HDMI/Audio(Common)	Stereo Mini Jack, DVI/HDMI/Audio(Common)
		USB	USB 2.0 x 2	USB 2.0 x2
		RGB	N/A	N/A
Connectivity	OLITOLIT	VIDEO	N/A	N/A
	OUTPUT	AUDIO Dougr Out	Stereo Mini Jack	Stereo Mini Jack
		Power Out USB	N/A N/A	N/A N/A
	EXTERNAL CONTROL		RS232C(in/out) thru stereo jack, RJ45	RS232C(in/out) thru stereo jack, RJ45
	EXTERNAL SENSOR		RS232C(II)/out) tilla steleo jack, r043	RS232C(II)/out) und stereo jack, RS43
	Tuner		N/A	N/A
	Туре		Internal	Internal
	Power Supply		AC100 - 240 V, 50/60 Hz	AC100 - 240 V, 50/60 Hz
		Max [W/h]	181.5	231
Power		Typical [W/h]	128	150
	PowerConsumption	Rating [W/h]	165	210
	2223pc.011	BTU (Max)	618.9	7877
		Sleep mode	0.5	0.5
		Off mode Set	N/A 1453.9 x 831.0 x 46.3	N/A 14911 v 0401 v 407
	Dimension (mm)	Set Package	1453.9 x 851.0 x 46.3 1611 x 973 x 185	1681.1 x 960.1 x 49.7 1871 x 1127 x 223
		Set	1611 x 9/3 x 185 24,9	18/1X11Z/XZZS 38.3
	Weight (kg)	Package	33.3	49
MechanicalSpec	VESA Mount		400 X 400	400 X 400
	Protection Glass		N/A	N/A
	Stand Type		No	No
	Bezel Width (Top/Side	e/Bot) (mm)	9.2mm(U/L/R),11.2mm(B)	11.5mm(U/L/R),12.5mm(B)
Operation	Operating Temperatu	ure	0°C~ 40°C	0°C~ 40°C
,	Humidity		10~80%	10~80%
	Key		UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0	UHD Signage Display Slim & Light Signage with Built-in MagicInfo S6, SSSP 6.0
	Orientation		Landscape / Portrait	Landscape / Portrait
		H/W	Temperature Sensor, Pivot Display, Clock Battery (168hrs Clock Keeping),	Temperature Sensor, Pivot Display, Clock Battery(168hrs Clock Keeping),
	Special		Built in Speaker(10W 2ch), IP5x Rating, Wi-Fi Auto Source Switching & Recovery,	Built in Speaker(10W2ch), IP5x Rating, Wi-Fi Auto Source Switching & Recovery,
		S/W	LFD Home UI, Button Lock, Hot key option,	LFD Home UJ, Button Lock, Hot key option, Plug&Play (Initial Setting)
		Processor	Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU	Plug&Play (Initial Setting) Cortex A721.7GHz Quad-Core CPU
		On-Chip Cache	L1 Instruction Cache : 48KB	L1 Instruction Cache : 48KB
		Memory	L1 Data Cache : 32KB L2 Cache : 2MB	L1 Data Cache : 32KB L2 Cache : 2MB
Feature		Clock Speed	1.7GHz	1.7GHz
	Internal Player (Embedded H/W)	Main Memory	2.5GB	2.5GB
		Interface	LPDDR41.5GHz 64bit Graphic resolution : 1920 x1080	LPDDR41.5GHz 64bit Graphic resolution :1920 x1080
		Graphics	Output resolution : 3840 x 2160	Output resolution: 3840 x 2160
		Storage (EDM)	(Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available)	(Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available)
		Storage (FDM)	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC,	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC,
		Multimedia	UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG	UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG
		IO Ports	USB 2.0	"Addio Decodel : ACS (DD), MPEG USB 2.0
	Operating System		Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)
	Safety		60950-1	60950-1
Certification	EMC		Class B	Class B
	Environment		ENERGY STAR 8.0, Epeat	ENERGY STAR 8.0, Epeat
	Security		802.1x(WPA2 Enterprise): EAP-TLS, EAP-TTLS, EAP-PEAP	802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP
	Included		Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries	Quick Setup Guide, Warranty Card, Power Cord, Remote Controller, Batteries
Accessories	Stand		-	-
	Optional	Mount	WMN4277SE (Land Only) / WMN750ME	WMN4277SE (Land Only) / WMN6575SE
		Specialty	CML450K	CML450K
		Media Player	N/A	N/A

Specifications

	Model		QB85R-B	QB98T-B
	Diagonal Circ	Class	85	98
	Diagonal Size	Measured	84.5	97.5
	Туре		Edge LED BLU	Direct LED BLU
	Resolution		UHD (3840 x 2160)	UHD (3840 x 2160)
	Pixel Pitch (mm)		0.4875 x 0.4875	0.562 x 0.562
	Active Display Area Brightness (Typ.)		1872.0(H) x1053.01(V) 350	2158.848(H) x1214.352(V) 350
Panel	Contrast Ratio (Typ.)		4000:1	1200:1
	Viewing Angle (H/V)		178/178	178/178
	Response Time (G to G)		8ms(Typ.)	8ms(Typ.)
	Display Colors		16.7M(True Display)	16.7M(True Display)
	Color Gamut		1.07B(Ditherd10bit) 92% (DCI-P3, CIE1976)	1.07B(Ditherd10bit) 72%
	Operation Hour		16/7	24/7
	Haze		2%	25%
Display	Dynamic C/R		MEGA	MEGA
	H-Scanning Frequency		30 ~ 81kHZ	30 ~ 81kHZ
Display	V-Scanning Frequency		48~75HZ	48~75HZ
	Maximum Pixel Frequency		594MHz	594MHz
Sound	SpeakerType	D.C.D.	Built in Speaker(10W+10W)	Built in Speaker(10W+10W)
		RGB	DVI-D	DVI-D, Display Port1.2 (1)
	INPUT	VIDEO HDCP	HDMI 2.0 (2) HDCP 2.2	HDMI 2.0 (2) HDCP2.2
		AUDIO	Stereo Mini Jack, DVI/HDMI/Audio(Common)	Stereo mini Jack, DVI, HDMI
		USB	USB 2.0 x 2	USB 2.0 x 2
		RGB	N/A	HDMI 2.0 (Loop-out)
Connectivity		VIDEO	N/A	N/A
	OUTPUT	AUDIO	Stereo Mini Jack	Stereo mini Jack
		Power Out	N/A	N/A
		USB	N/A	N/A
	EXTERNAL CONTROL		RS232C(in/out) thru stereo jack, RJ45 IR	RS232C(in/out) thru stereo jack, RJ45 IR
	EXTERNAL SENSOR Tuner		N/A	N/A
	Туре		Internal	Internal
	PowerSupply		AC100 - 240 V, 50/60 Hz	AC100 - 240 V,50/60 Hz
		Max [W/h]	198	462
Power		Typical [W/h]	143	360
	Power Consumption	Rating [W/h]	180	420
		BTU (Max)	675.2	1576.4
		Sleep mode Off mode	0.5 N/A	0.5 N/A
		Set	1897.8 x1080.8 x 56.7	2195.8 x 1250.8 x 96.5
	Dimension (mm)	Package	2090 x1247 x260	2369 x1405 x 350
	Mainte (Inc.)	Set	48.4	83
Mechanical	Weight (kg)	Package	63.7	106
Spec	VESA Mount		600 X 400	800 x 400
	Protection Glass		N/A	N/A
	Stand Type Denot Width (Top (Cide (Det) (mm))		N/A 10.9mm(U/L/R),12.9mm(B)	N/A 17.9
	Bezel Width (Top/Side/Bot) (mm) Operating Temperature		0°C~ 40°C	17.7 0°C~ 40°C
Operation	Humidity		10~80%	10~80%
	Key		UHD Signage Display Slim & Light Signage with	UHD Signage Display Slim & Light Signage with
	Orientation		Built-in MagicInfo S6, SSSP 6.0	Built-in MagicInfo S6, SSSP 6.0
	Orientation	HAM	Landscape / Portrait Temperature Sensor, Pivot Display, Clock Battery(168hrs Clock Keeping),	Landscape / Portrait Temperature Sensor,Pivot Display, Clock Battery(168hrs Clock Keeping),
	Coociel	H/W	Built in Speaker (10W 2ch), IP5x Rating, Wi-Fi	Built in Speaker (10W 2ch), Video Wall Daisy Chain (HDCP2.2:4EA,HDCP1.4:7EA), Wi-Fi
Feature	Special	S/W	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option,	Auto Source Switching & Recovery, LFD Home UI, Button Lock, Hot key option,
		Dragage	Plug&Play (Initial Setting)	Plug&Play (Initial Setting)
		Processor	Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB	Cortex A721.7GHz Quad-Core CPU L1 Instruction Cache : 48KB
		On-Chip Cache Memory	L1 Data Cache : 32KB	L1 Data Cache : 32KB
	Internal Player (Embedded H/W)	Clock Speed	L2 Cache : 2MB 1.7GHz	L2 Cache : 2MB 1.7GHz
		Main Memory	2.5GB	2.5GB
		Interface	LPDDR41.5GHz 64bit	LPDDR41.5GHz 64bit
		Graphics	Graphic resolution : 1920 x 1080 Output resolution : 3840 x 2160	Graphic resolution : 1920x1080 Output resolution : 3840x2160
		Storage (FDM)	(Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available)	(Scale up from graphic processing result.) 8GB (3.88GB Occupied by O/S, 4.12GB Available)
			*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC,	*Video Decoder : MPEG-1/2/4, H.263, H.264/AVC,
		Multimedia	UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder : AC3 (DD), MPEG	UHD H.264/AVC, VC-1, AVS+, HEVC, JPEG, PNG, VP8, VP9 *Audio Decoder: AC3 (DD), MPEG
		IO Ports	USB 2.0	USB 2.0
	Operating System		Tizen 4.0 (VDLinux)	Tizen 4.0 (VDLinux)
Certification	Safety		60950-1	60950-1
	EMC		Class A	Class A
	Environment		N/A 802.1x(WPA2 Enterprise) (20.1~) : EAP-TLS, EAP-TTLS, EAP-PEAP	N/A 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP
	Security		80Z.1x(WPAZ Enterprise) (20.1~) : EAP-1LS, EAP-1LS, EAP-PEAP Quick Setup Guide, Warranty Card,	8UZ.IX(WPAZ Enterprise) : EAP-ILS, EAP-ILS, EAP-PEAP Quick Setup Guide, Warranty Card,
Accessories	Included		Power Cord, Remote Controller, Batteries	Power Cord, Remote Controller, Batteries
		Stand	MINNIOJOUCE (WINNIOJOUCE	MMM9200CC II and Only)
	Optional	Mount Specialty	WMN8200SF / WMN8200SG -	WMN8200SG (Land Only)
		Media Player	N/A	N/A
		.,.		·

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, cameras, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com.

Smart Signage

For more information about Samsung Smart Signage QBR-B, QBT-B series Displays, visit www.samsung.com/business or www.samsung.com/displaysolutions

Copyright © 2022 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd. 416, Maetan 3-dong, Yeongtong-gu, Suwon-si, Gyeonggi-do 443-772, Korea

2022-06

