

SC-PSW0402E-A

4K Presentation Device 0402



- 4K@60Hz 4:4:4 HDR 10
- 4 x HDMI Input, 2 x HDMI Output
- HDCP 2.2
- De-embedder Audio Output
- EDID Management


It has ideal and scalable transition feature for meeting and VIP rooms

SC-PSW0402E-A can easily to manage API commands over network, presentation device has EDID management

It has audio de-embedding feature with optical and 3.5mm stereo output

Features

- 4K featured, 4 HDMI input and 2 HDMI output,
- Supports HDMI 2.0,
- Supports 18G 4K@60 4:4:4 HDR 10,
- Supports HDCP 2.2,
- Spdif and 3.5mm stereo audio output De-embedder
- Scaling feature 4K to 1080p,
- Matrix output and ARC function,
- RS232, IR and TCP/IP (UI) control features
- Front panel control buttons,
- EDID and HDCP management

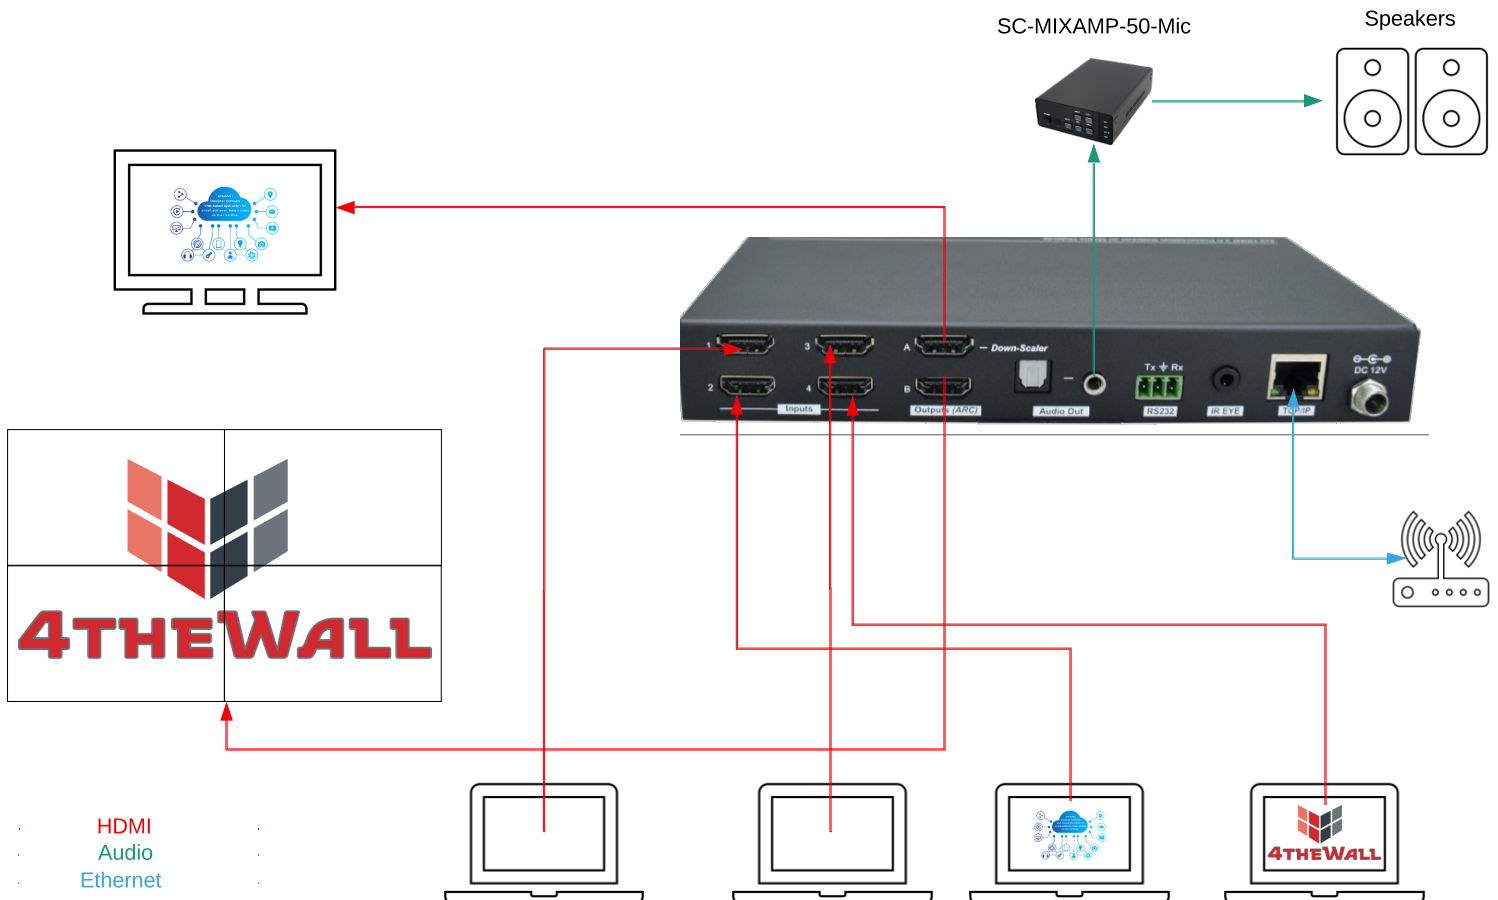

Input and Output

| | |
|--------------|---|
| Video Input | 4 x 4K HDMI , HDCP 2.2 |
| Audio Input | 4 x HDMI embed audio input , Dolby Vision |
| Video Output | 2 x 4K HDMI matrix and scaled video output, HDCP 2.2 |
| Audio Output | 1 x HDMI, 1 x Optik and 1 x Stereo audio output, Dolby Vision |
| Resolutions | Maximum 4K@60 Hz 4:4:4 HDR 10 |

Network Features

| | |
|---------------------|-----------------------------|
| Ethernet | 1x RJ45 100Mbit |
| IP address features | DHCP, local link , fixed IP |

Management Features

| | |
|---------------------------|---|
| Hardware Software Upgrade | Ethernet |
| Management Options | Web user interface, API, front panel button |

General Features

| | |
|---------------------|---|
| Power Connection | 12V DC 1 Amper, locked connection type |
| Working Temperature | 0°C~40°C / 32°F~104°F |
| Humidity Range | 20~90% RH |
| Storage Temperature | -20°C~60°C / -4°F~140°F |
| ESD Protection | ±8kV (air-gap discharge) ±4kV (connection discharge) |
| Dimensions | 200mm × 100mm × 28.5mm - Width/Depth/Height |
| Weight | 605g |
| Power Value | 58.3W |
| Mounting | Compatible 1U 19" rack (optional accessory) |

Certifications

| | |
|--------|----------|
| AB/ABD | CE / FCC |
|--------|----------|

Package Details

| | |
|-----------------------|--|
| Dimensions (packaged) | 275mm x 245mm x 100mm - Width/Depth/Height |
| Weight (packaged) | 1.1kg |



Front View



Rear View